

## Generator set data sheet



**Model:** C2000 D5  
**Frequency:** 50 Hz  
**Fuel type:** Diesel

<b>Spec sheet:</b>	SS17-CPGK
<b>Noise data sheet:</b>	ND50-OSHHP
<b>Airflow data sheet:</b>	AF50-HHP
<b>Derate data sheet:</b>	DD50-OSHHP
<b>Transient data sheet:</b>	RTF

<b>Fuel consumption</b>	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	2063 (1650)				1875 (1500)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	32.2	54.9	79.2	107.1	29.5	50.2	71.3	95.7
L/hr	122	208	300	406	112	190	270	363

<b>Engine</b>	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	QSK60-G3	
Configuration	Cast iron, 60° V16 cylinder	
Aspiration	Turbocharged and low temperature after-cooled	
Gross engine power output, kWm	1790	1615
BMEP at set rated load, kPa	2379	2144
Bore, mm	159	
Stroke, mm	190	
Rated speed, rpm	1500	
Piston speed, m/s	9.5	
Compression ratio	14.5:1	
Lube oil capacity, L	378	
Overspeed limit, rpm	1725 ±50	
Regenerative power, kW	146	
Governor type	Electronic	
Starting voltage	24 Volts DC	

<b>Fuel flow</b>	
Maximum fuel flow, L/hr	1515
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature, °C	70

<b>Air</b>	<b>Standby rating</b>	<b>Prime rating</b>
Combustion air, m <sup>3</sup> /min	135	129
Maximum air cleaner restriction, kPa	6.2	

<b>Exhaust</b>		
Exhaust gas flow at set rated load, m <sup>3</sup> /min	332	306
Exhaust gas temperature, °C	440	415
Maximum exhaust back pressure, kPa	6.7	

<b>Standard set-mounted radiator cooling</b>		
Ambient design, °C	40	
Fan load, kW <sub>m</sub>	33	
Coolant capacity (with radiator), L	456	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mm H <sub>2</sub> O	26.4	
Total heat rejection, Btu/min	48925	44125
Maximum cooling air flow static restriction mm H <sub>2</sub> O	12.7	


<b>Weights*</b>	<b>Open</b>	<b>Enclosed</b>
Unit dry weight kgs	14880	
Unit wet weight kgs	15945	

\* Weights represent a set with standard features. See outline drawing for weights of other configurations.

<b>Dimensions</b>	<b>Length</b>	<b>Width</b>	<b>Height</b>
Standard open set dimensions mm	6175	2286	2537
Enclosed set standard dimensions mm	RTF	RTF	RTF

## Genset outline

### Open set

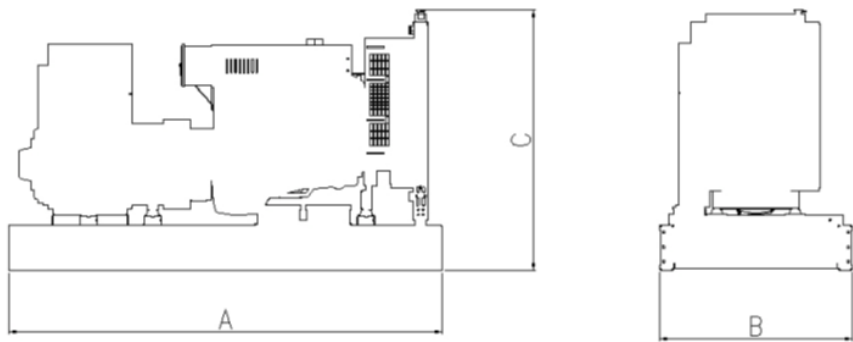

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	150/125	S/P	PI734F	380-440 V
Wye, 3-phase	105*	P	P1734G	380-440 V
Wye, 3-phase	105/80	S/P	MVSI804R	3300 V
Wye, 3-phase	125/105	S/P	HVSI804R	6300-6600 V
Wye, 3-phase	125/105	S/P	HVSI804R	10500-11000 V

\*Option available only through ETO (Engineering to Order)

## Ratings definitions

Emergency Standby Power (ESP):	Limited-Time Running Power (LTP):	Prime Power (PRP):	Base Load (Continuous) Power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

## Formulas for calculating full load currents:

Three phase output	Single phase output
$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$	$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$

For more information contact your local Cummins distributor or visit [power.cummins.com](http://power.cummins.com)

Our energy working for you.™

